

DIO5030

600mA, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

Features

- Input Rating of 32V
- Input Overvoltage Protection with 6.5V
- Input Voltage Dynamic Power Management
- 10% Charge Current Accuracy
- 1% Charge Voltage Accuracy
- Programmable Termination and Trickle Threshold
- Fixed 10 Hours Safety Timer
- Status Indication – Charging/Done
- Integrated Auto Start Function for Production
- Charge Solutions for JEITA
 1. No charge at 'Temp>45°C' & 'Temp<0°C';
 2. 0.2*CC (Constant-Current) Temp at 0~10°C;
 3. Constant-Current Temp at 10~45°C.
- Automatic Termination and Timer Disable Mode (TTDM) for Absent Battery Pack With Thermistor
- Package: SOT23-6

Applications

- Low-Power Handheld Devices
- Smart Phones
- MP3 Players
- PDAs

Ordering Information

Order Part Number	Top Marking		T _A	Package	
DIO5030ST6	YWWA	Green	-40 to 85°C	SOT23-6	Tape & Reel, 3000

Descriptions

DIO5030 is highly integrated lithium ion and lithium polymer linear chargers, suitable for portable applications with limited space. The device is powered by a USB port or AC adapter. The high input voltage range with input overvoltage protection supports low-cost, unregulated adapters.

DIO5030 has a single power output and can charge batteries. If the average system load fails to charge the battery during the 10-hour safety timer, the system load can be connected in parallel with the battery.

Battery charging has experienced three stages: conditioning, constant current and constant voltage. In all charging stages, IC junction temperature is monitored by the internal control loop. When the charging current exceeds the internal temperature threshold, the internal control loop will reduce the charging current.

The charger power level and charging current induction function are fully integrated. The charger has high precision current and voltage regulation circuit function, charging status display, charging termination function. The trickle-charge current is fixed at $2/10 \cdot I_{BAT}$ and the terminal-charge current is fixed at $1/10 \cdot I_{BAT}$.

Pin Assignment

SOT23-6

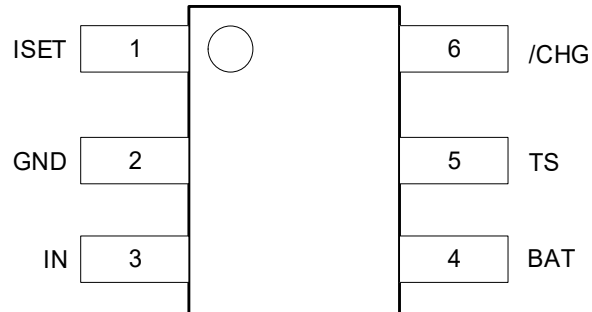


Figure 1. Top View

Pin Descriptions

Name	Description
IN	Input power, connected to external DC supply (AC adapter or USB port). Expected range of bypass capacitors 1 μ F to 10 μ F, connect from IN to GND.
ISET	Programs the constant charge current setting. External resistor from ISET to GND defines constant charge current value. Range is 4.7k Ω (100mA) to 0.75k Ω (600mA).
/CHG	Low (FET on) indicates charging and Open Drain (FET off) indicates no Charging or Charge complete.
TS	Temperature sense terminal connected to DIO5030 -10k at 25 $^{\circ}$ C NTC thermistor, in the battery pack. Floating T terminal or pulling High puts part in TTDM "Charger" Mode and disable TS monitoring, Timers and Termination. Pulling terminal Low disables the IC. If NTC sensing is not needed, connect this terminal to GND through an external 10 k Ω resistor. A 250k Ω from TS to ground will prevent IC entering TTDM mode when battery with thermistor is removed.
BAT	Battery Connection. System Load may be connected. Expected range of bypass capacitors 1 μ F to 10 μ F.
GND	Ground.



DIO5030

600mA, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

Absolute Maximum Ratings

Stresses beyond those listed under "Absolute Maximum Rating" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Parameter		Rating	Unit
Input Voltage	IN (with respect to GND)	-0.3 to 36	V
	BAT (with respect to GND)	-0.3 to 7	
	ISET, TS, /CHG, (with respect to GND)	-0.3 to 7	
Input Current	IN	800	mA
Output Current (Continuous)	BAT	800	mA
Output Sink Current	/CHG	15	mA
Junction Temperature		-40 to 150	°C
Storage Temperature		-65 to 150	°C
Package Thermal Resistance	Θ_{JA}	63.5	°C/W
ESD	Human-body model (HBM)	±6000	V
	Charged-device model (CDM)	±1500	

Recommend Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended Operating conditions are specified to ensure optimal performance to the datasheet specifications. DIOO does not Recommend exceeding them or designing to Absolute Maximum Ratings.

Symbol	Parameter	Min	Max	Unit
V_{IN}	IN voltage range	3.5	32	V
	IN operating voltage range, Restricted by V_{DPM} and V_{OVP}	4.45	6.3	V
I_{IN}	Input current, IN terminal		600	mA
I_{BAT}	Current, BAT terminal		600	mA
T_J	Junction temperature	0	125	°C
R_{ISET}	Constant charge current programming resistor	0.5	20	kΩ
R_{TS}	10k NTC thermistor range without entering TTDM	1.66	500	kΩ



DIO5030

600mA, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

Electrical Characteristics

Over junction temperature range $0^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ and recommended supply voltage (unless otherwise noted).

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
INPUT						
UVLO	Under voltage lock-out Exit	V_{IN} : From Low to High	2.85	3.0	3.15	V
V_{HYS_UVLO}	Hysteresis			180		mV
V_{IN_DT}	Input power good detection threshold is $V_{BAT} + V_{IN_DT}$	(Input power good if $V_{IN} > V_{BAT} + V_{IN_DT}$); $V_{BAT} = 3.6\text{V}$, V_{IN} : $3.5\text{V} \rightarrow 4\text{V}$		120		mV
V_{HYS_INDT}	Hysteresis on V_{IN_DT} falling			80		mV
V_{OVP}	Input over-voltage protection threshold	V_{IN} : $5\text{V} \rightarrow 12\text{V}$	6.3	6.5	6.9	V
V_{HYS_OVP}	Hysteresis on OVP	V_{IN} : $12\text{V} \rightarrow 5\text{V}$		200		mV
V_{IN_DPM}	USB/Adaptor low input voltage protection. Restricts I_{BAT} at V_{IN_DPM}	Limit Input Source Current to 50mA; $V_{BAT} = 3.5\text{V}$; $R_{ISET} = 2\text{K}\Omega$	4.34	4.4	4.46	V
BATTERY SHORT PROTECTION						
$V_{BAT(SC)}$	BAT terminal short-circuit detection threshold/trickle charge threshold	V_{BAT} : $3\text{V} \rightarrow 0.5\text{V}$, no deglitch	0.75	0.8	0.85	V
$V_{BAT(SC-HYS)}$	BAT terminal Short hysteresis	Recovery $\geq V_{BAT(SC)} + V_{BAT(SC-HYS)}$; Rising, no Deglitch		20		mV
$I_{BAT(SC)}$	Source current to BAT terminal during short-circuit detection			10		mA
QUIESCENT CURRENT						
$I_{BAT(PDWN)}$	Battery current into BAT terminal	$V_{IN} = 0\text{V}$			1	μA
$I_{BAT(DONE)}$	BAT terminal current, charging terminated	$V_{IN} = 6\text{V}$, $V_{BAT} > V_{BAT(REG)}$			6	
$I_{IN(STDBY)}$	Standby current into IN terminal	$T_S = \text{Low}$, $V_{IN} \leq 6\text{V}$			125	μA
I_{CC}	Active supply current, IN terminal	$T_S = \text{open}$, $V_{IN} = 6\text{V}$, T_{TDM} – no load on BAT terminal, $V_{BAT} > V_{BAT(REG)}$, IC enabled		0.8	1	mA
BATTERY CHARGER CONSTANT-CHARGE						
$V_{BAT(REG)}$	Battery regulation voltage	$V_{IN} = 5\text{V}$, ($V_{TS-45^{\circ}\text{C}} \leq V_{TS} \leq V_{TS-0^{\circ}\text{C}}$)	4.16	4.2	4.23	V



DIO5030

600mA, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

I_{BAT_RANGE}	Programmed output “constant charge” current	$V_{BAT(REG)} > V_{BAT} > V_{LOWV}$; $V_{IN} = 5V$, $R_{ISET} = 9K\Omega$ to $0.45K\Omega$	50		600	mA
$V_{DO(IN-BAT)}$	Drop-out, $V_{IN} - V_{BAT}$	Adjust V_{IN} down until $I_{BAT} = 0.5A$, $V_{BAT} = 4.15V$, $R_{ISET} = 1K\Omega$, $T_J \leq 100^{\circ}C$	325		500	mV
I_{BAT}	Output “constant current” formula	$V_{BAT(REG)} > V_{BAT} > V_{LOWV}$; $V_{IN} = 5V$	$(1V/R_{ISET})*470$			A
TRICKLE CURRENT						
V_{LOWV}	Trickle current to constant current charge transition threshold		2.4	2.5	2.6	V
$I_{Trickle}$	Trickle charge current		$2/10*I_{BAT}$			A
TERMINATION CURRENT						
$I_{Terminal}$	Termination charge current		$1/10*I_{BAT}$			A
RECHARGE OR REFRESH						
V_{RCH}	Recharge detection threshold – Normal Temp	$V_{IN} = 5V$, $V_{TS} = 0.5V$, $V_{BAT}: 4.25V \rightarrow V_{RCH}$	$V_{O(REG)}$ -0.2	$V_{O(REG)}$ -0.15	$V_{O(REG)}$ -0.1	V
BATTERY-PACK NTC MONITOR; TS Terminal						
$I_{NTC-10k}$	NTC bias current	$V_{TS} = 0.3V$	48	50	52	μA
$V_{TTDM(TS)}$	Termination and timer disable mode Threshold – Enter	$V_{TS}: 1.5V \rightarrow 4V$; Timer Held in Reset	3.6	3.7	3.8	V
$V_{HYS-TTDM(TS)}$	Hysteresis			100		mV
$V_{CLAMP(TS)}$	TS maximum voltage clamp	$V_{TS} = \text{Open (Float)}$		V_{IN}		V
$V_{TS-0^{\circ}C}$	Low temperature CHG Pending	Low Temp Charging to Pending; $V_{TS}: 1V \rightarrow 1.5V$	1.384			V
$V_{HYS-0^{\circ}C}$	Hysteresis at $0^{\circ}C$	Charge pending to low temp charging; $V_{TS}: 1.5V \rightarrow 1V$		60		mV
$V_{TS-10^{\circ}C}$	Low temperature, half charge	Normal charging to low temp charging; $V_{TS}: 0.5V \rightarrow 1V$		920		mV
$V_{HYS-10^{\circ}C}$	Hysteresis at $10^{\circ}C$	Low temp charging to normal CHG; $V_{TS}: 1V \rightarrow 0.5V$		20		mV
$V_{TS-45^{\circ}C}$	High temperature at 4.1V	Normal charging to high temp CHG; $V_{TS}: 0.5V \rightarrow 0.2V$			246.8	mV



DIO5030

600mA, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

$V_{HYS-45^{\circ}C}$	Hysteresis at 45°C	High temp charging to normal CHG; $V_{TS}: 0.2V \rightarrow 0.5V$		10		mV
$V_{TS-EN-10k}$	Charge Enable Threshold, (10k NTC)	$V_{TS}: 0V \rightarrow 0.175V$;		100		mV
$V_{TS-DIS_HYS-10k}$	HYS below $V_{TS-EN-10k}$ to Disable, (10k NTC)	$V_{TS}: 0.125V \rightarrow 0V$;		12		mV
THERMAL REGULATION						
$T_{J(REG)}$	Temperature regulation limit			135		°C
$T_{J(OFF)}$	Thermal shutdown temperature			155		°C
$T_{J(OFF-HYS)}$	Thermal shutdown hysteresis			20		°C
LOGIC LEVELS ON /CHG						
V_{OL}	Output LOW voltage	$I_{SINK} = 5mA$			0.4	V
I_{LEAK}	Leakage current into IC	$V_{CHG} = 5V$			1	μA
INPUT						
$t_{DGL(OVP-SET)}$	Input over-voltage blanking time	$V_{IN}: 5V \rightarrow 12V$		5		μs
$t_{DGL(OVP-REC)}$	Deglitch time exiting OVP			800		μs
RECHARGE OR REFRESH						
$t_{DGL1(RCH)}$	Deglitch time, recharge threshold detected	$V_{IN} = 5V, V_{TS} = 0.5V$, $V_{BAT}: 4.25V \rightarrow 3.5V$ in 1μs; $t_{DGL(RCH)}$ is time to ISET ramp		29		ms
$t_{DGL2(RCH)}$	Deglitch time, recharge threshold detected in BAT-Detect Mode	$V_{IN} = 5V, V_{TS} = 0.5V$, $V_{BAT} = 3.5V$ inserted; $t_{DGL(RCH)}$ is time to ISET ramp		150		us
BATTERY CHARGING TIMERS AND FAULT TIMERS						
$T_{TRICKLE-CHG}$	Trickle safety timer value	Restarts when entering Trickle charge; Always enabled when in Trickle charge.	1700	1940	2250	s
t_{MAXCH}	Charge safety timer value	Clears fault or resets at UVLO, TS disable, BAT Short, exiting LOWV and Refresh	34000	38800	45000	s
BATTERY-PACK NTC MONITOR; TS Terminal						
$t_{DGL(TTDM)}$	Deglitch exit TTDM between states			57		ms
	Deglitch enter TTDM between states			400		μs



DIO5030

600mA, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

$t_{DGL(TS_10^{\circ}C)}$	Deglitch for TS thresholds: 10°C.	Normal to Cold Operation; $V_{TS}: 0.6V \rightarrow 1V$		50		ms
		Cold to Normal Operation; $V_{TS}: 1V \rightarrow 0.6V$		12		ms
	Deglitch for TS thresholds: 0/45°C.	Battery charging		30		ms

Specifications subject to change without notice.



DIO5030

Detailed Description

Overview

The DIO5030 is a highly integrate single cell Li-Ion and Li-Pol charger. The charger can be used to charge a battery, power a system or both. The charger has three phases of charging: Trickle-charge to recover a fully discharged battery, constant current charge to supply the buck charge safely and voltage regulation to safely reach full capacity. The charger is very flexible, allowing programming of the constant-charge current and Trickle-charge/Termination Current. This charger is designed to work with a USB connection or Adaptor (DC out). The charger also checks to see if a battery is present.

The charger also comes with a full set of safety features: JEITA Temperature Standard, Over-Voltage Protection, DPM-IN and Safety Timers. All of these features and more are described in detail below.

The charger is designed for a single power path from the input to the output to charge a single cell Li-Ion or Li-Pol battery pack. Upon application of a 5VDC power source the ISET and BAT short checks are performed to assure a proper charge cycle.

Once the battery voltage has charged to the V_{LOWV} threshold, constant current charge is applied. The constant current is programmed using the ISET terminal. The constant current provides the bulk of the charge. Power dissipation in the IC is greatest in constant charge with a lower battery voltage. If the IC reaches 125°C the IC enters thermal regulation, slows the timer clock by half and reduce the charge current as needed to keep the temperature from rising any further.

Once the cell has charged to the regulation voltage the voltage loop takes control and holds the battery at the regulation voltage until the current tapers to the termination threshold. The termination can be disabled if desired. The /CHG terminal is low (LED on) during the first charge cycle only and turns off once the termination threshold is reached, regardless if termination, for charge current, is enabled or disabled.

Feature Description

Power-Down or Under voltage Lockout (UVLO)

The DIO5030 is in power down mode if the IN terminal voltage is less than UVLO. The part is considered “dead” and all the terminals are high impedance. Once the IN voltage rises above the UVLO threshold the IC will enter Sleep Mode or Active mode depending on the BAT terminal (battery) voltage.

Power-up

The IC is alive after the IN voltage ramps above UVLO (see sleep mode), resets all logic and timers, and starts to perform many of the continuous monitoring routines. Typically the input voltage quickly rises through the UVLO and sleep states where the IC declares power good, starts the qualification charge at 100mA, starts the safety timer and enables the /CHG terminal.

Sleep Mode

If the IN terminal voltage is between than $V_{BAT}+V_{DT}$ and UVLO, the charge current is disabled, the safety timer counting stops (not reset) and /CHG terminals are high impedance. As the input voltage rises and the charger exits sleep mode, the /PG terminal goes low, the safety timer continues to count, charge is enabled and the /CHG terminal returns to its previous state.



DIO5030

New Charge Cycle

A new charge cycle is started when a good power source is applied, performing a chip disable/enable (TS terminal), exiting Termination and Timer Disable Mode (TTDM), detecting a battery insertion or the BAT voltage drop terminal goes below the V_{RCH} threshold. The /CHG terminal is active low only during the first charge cycle, therefore exiting TTDM or a drop terminal goes below V_{RCH} will not turn on the /CHG terminal FET, if the /CHG terminal is already high impedance.

Overvoltage-Protection (OVP) – Continuously Monitored

If the input source applies an overvoltage, the pass FET, if previously on, turns off after a deglitch, $t_{BLK(OVP)}$. The timer ends and the /CHG terminal goes to a high impedance state. Once the overvoltage returns to a normal voltage, timer continues, charge continues and the /CHG terminal goes low after a 25ms deglitch.

Device Functional Modes

/CHG LED Pull-up Source

For host monitoring, a pull-up resistor is used between the "STATUS" terminal and the VCC of the host and for a visual indication a resistor in series with an LED is connected between the "STATUS" terminal and a power source. The /CHG source is capable of exceeding 8V. If the source is the BAT terminal, note that as the battery changes voltage, and the brightness of the LEDs vary.

Charging State	/CHG FET/LED
Charge after VIN applied	ON
Refresh Charge	
OVP	OFF
SLEEP	

IN-DPM (VIN-DPM or IN-DPM)

The IN-DPM feature is used to detect an input source voltage that is folding back (voltage drop terminal g), reaching its current limit due to excessive load. When the input voltage drops to the V_{IN-DPM} threshold the internal pass FET starts to reduce the current until there is no further drop in voltage at the input. This would prevent a source with voltage less than V_{IN-DPM} to power the BAT terminal. This works well with current limited adaptors and USB ports as long as the nominal voltage is 4.4V. This is an added safety feature that helps protect the source from excessive loads.

BAT

The Charger's BAT terminal provides current to the battery and to the system, if present. This IC can be used to charge the battery plus power the system, charge just the battery or just power the system (TTDM) assuming the loads do not exceed the available current. The BAT terminal is a current limited source and is inherently protected against shorts. If the system load ever exceeds the output programmed current threshold, the output will be discharged unless there is sufficient capacitance or a charged battery present to supplement the excessive load.

ISSET


An external resistor is used to Program the Output Current (100 to 600mA) and can be used as a current monitor.

$$I_{BAT-CC} = 470/R_{ISSET} \quad (1)$$

Where:

- I_{BAT} is the desired constant charge current;

For greater accuracy at lower currents, part of the sense FET is disabled to give better resolution.

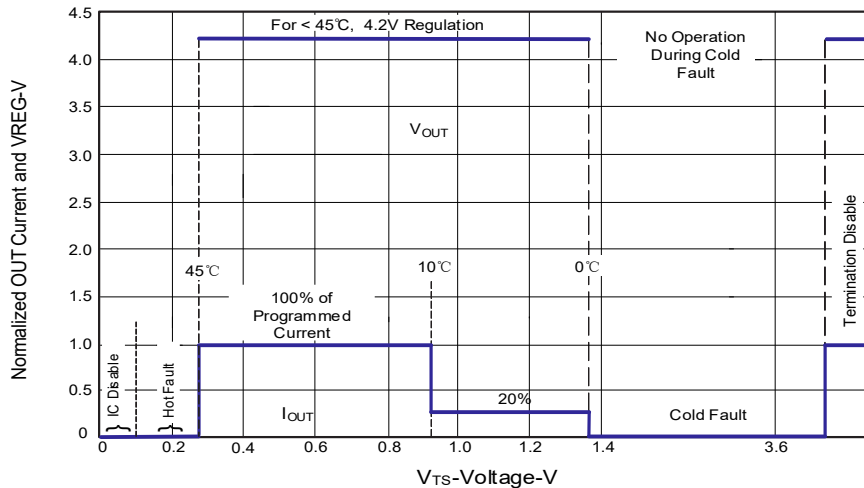

DIO5030

Figure 2. Operation Over TS Bias Voltage

TS

The TS function is designed to follow the new JEITA temperature standard for Li-Ion and Li-Pol batteries. There are now three thresholds 45°C, 10°C, and 0°C.

For DIO5030: Normal operation occurs between 10°C and 45°C. If between 0°C and 10°C the charge current level is $0.2 \cdot I_{BAT}$ and if less than 0°C or more than 45°C, the charging is disable.

The TS feature is implemented using an internal 50µA current source to bias the thermistor designed for use with a 10k NTC (recommend CN0402R103B3435FB from Sensicom Electronics Technology CO.) connected from the TS terminal to GND. If this feature is not needed, a fixed 10kΩ can be placed between TS and GND to allow normal operation. This may be done if the host is monitoring the thermistor and then the host would determine when to pull the TS terminal low to disable charge.

The TS terminal has two additional features, when the TS terminal is pulled low or floated/driven high. A low disables charge and a high puts the charger in TTDM.

Once the thermistor reaches $\approx -10^\circ\text{C}$ the TS current folds back to keep a cold thermistor (between -10°C and -50°C) from placing the IC in the TTDM mode. If the TS terminal is pulled low into disable mode, the current is reduce to $\approx 30\mu\text{A}$. Since the I_{TS} current is fixed along with the temperature thresholds, it is not possible to use thermistor values other than the 10k NTC (at 25°C).

Termination and Timer Disable Mode (TTDM) - TS Terminal High

The battery charger is in TTDM when the TS terminal goes high from removing the thermistor (removing battery pack/floating the TS terminal) or by pulling the TS terminal up to the TTDM threshold.



DIO5030

When entering TTDM, the 10 hours safety timer is held in reset and termination is disabled. A battery detect routine is run to see if the battery was removed or not. If the battery was removed then the /CHG terminal will go to its high impedance state if not already there. If a battery is detected the /CHG terminal does not change states until the current tapers to the termination threshold, where the /CHG terminal goes to its high impedance state if not already there (the regulated output will remain on).

The charging profile does not change (still has trickle-charger, constant current charge and constant voltage modes). This implies the battery is still charged safely and the current is allowed to taper to zero.

When coming out of TTDM, the battery detect routine is run and if a battery is detected, then a new charge cycle begins and the /CHG LED turns on.

Timers

The trickle-charge timer is set to 30 minutes. The trickle-charge current, can be programmed to off-set any system load, making sure that the 30 minutes is adequate.

The constant charge timer is fixed at 10 hours and can be increased real time by going into thermal regulation, IN- DPM or if in USB current limit. The timer clock slows by a factor of 2, resulting in a clock that counts half as fast when in these modes. If either the 30 minute or ten hour timer times out, the charging is terminated and the /CHG terminal goes high impedance if not already in that state. The timer is reset by disabling the IC, cycling power or going into and out of TTDM.

Termination

Once the BAT terminal goes above V_{RCH} , (reaches voltage regulation) and the current tapers down to the termination threshold, the /CHG terminal goes high impedance and a battery detect route is run to determine if the battery was removed or the battery is full. If the battery is present, the charge current will terminate. If the battery was removed along with the thermistor, then the TS terminal is driven high and the charge enters TTDM. If the battery was removed and the TS terminal is held in the active region, then the battery detect routine will continue until a battery is inserted.

Battery Detect Routine

The battery detect routine should check for a missing battery while keeping the BAT terminal at a useable voltage. Whenever the battery is missing the /CHG terminal should be high impedance.

The battery detect routine is run when entering and exiting TTDM to verify if battery is present, or run all the time if battery is missing and not in TTDM. On power-up, if battery voltage is greater than V_{RCH} threshold, a battery detect routine is run to determine if a battery is present.

The battery detect routine is disabled while the IC is in TTDM, or has a TS fault.

Refresh Threshold

After termination, if the BAT terminal voltage drops to V_{RCH} (100mV below regulation) then a new charge is initiated, but the /CHG terminal remains at a high impedance (off).

Starting a Charge on a Full Battery

The termination threshold is raised by $\approx 14\%$, for the first minute of a charge cycle so if a full battery is removed and reinserted or a new charge cycle is initiated, that the new charge terminates (less than 1 minute). Batteries have relaxed many hours may take several minutes to taper to the termination threshold and terminate charge.

Application Information

The DIO5030 is highly integrated Li-Ion and Li-Pol linear chargers devices targeted at space- limited portable applications. The devices operate from either a USB port or AC adapter. The high input voltage range with input overvoltage protection supports low-cost unregulated adapters. These devices have a single power output that charges the battery. A system load can be placed in parallel with the battery as long as the average system load does not keep the battery from charging fully during the 10 hours safety timer.

Typical Applications

$I_{BAT_CONSTANT_CHG} = 626mA$; $I_{BAT_TRICKLE_CHG} = 125.2mA$; $I_{BAT_TERM} = 62.6mA$

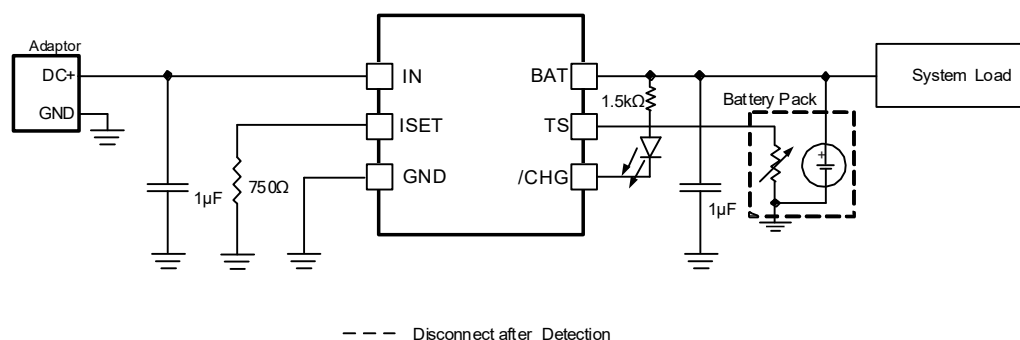


Figure 3. Typical Applications for DIO5030

Design Requirements

- Supply voltage = 5V
- Constant charge current: $I_{BAT} = 626mA$; $I_{SET} = 750\Omega$
- Termination Current Threshold: $I_{BAT} = 62.6mA$;
- Trickle-Charge Current by default is twice the termination Current or $\sim 125.2mA$
- TS – Battery Temperature Sense = 10k NTC ($\beta=3435$)

Detailed Design Procedures

Calculations

Program the Constant Charge Current, ISET :

$$R_{ISET} = [470 * I_{BAT-CC}] \quad (2)$$

TS Function

Use a 10k NTC thermistor in the battery pack.

To Disable the temp sense function, use a fixed 10k resistor between the TS (terminal 1) and GND.



DIO5030

/CHG

LED Status: connect a 1.5k resistor in series with a LED between the BAT terminal and the /CHG terminal.
Processor Monitoring: Connect a pull-up resistor between the processor's power rail and the /CHG terminal.

Selecting In and BAT Terminal Capacitors

In most applications, all that is needed is a high-frequency decoupling capacitor (ceramic) on the power terminal, input and output terminals. Using the values shown on the application diagram, is recommended. After evaluation of these voltage signals with real system operational conditions, one can determine if capacitance values can be adjusted toward the minimum recommended values (DC load application) or higher values for fast high amplitude pulsed load applications. Note if designed for high input voltage sources (bad adaptors or wrong adaptors), the capacitor needs to be rated appropriately. Ceramic capacitors are tested to 2x their rated values so a 16V capacitor may be adequate for a 30V transient (verify tested rating with capacitor manufacturer).

Thermal Package

The power pad should be directly connected to the GND terminal. The most common measure of package thermal performance is thermal impedance (θ_{JA}) measured (or modeled) from the chip junction to the air surrounding the package surface (ambient). The mathematical expression for θ_{JA} is:

$$\theta_{JA} = (T_J - T) / P \quad (3)$$

Where:

- T_J = chip junction temperature
- T = ambient temperature
- P = device power dissipation

Factors that can influence the measurement and calculation of θ_{JA} include:

1. Whether or not the device is board mounted
2. Trace size, composition, thickness, and geometry
3. Orientation of the device (horizontal or vertical)
4. Volume of the ambient air surrounding the device under test and airflow
5. Whether other surfaces are in close proximity to the device being tested

Due to the charge profile of Li-Ion and Li-Pol batteries the maximum power dissipation is typically seen at the beginning of the charge cycle when the battery voltage is at its lowest. Typically after constant charge begins the pack voltage increases to $\approx 3.4V$ within the first 2 minutes. The thermal time constant of the assembly typically takes a few minutes to heat up so when doing maximum power dissipation calculations, 3.4V is a good minimum voltage to use. The constant charge current will start to taper off if the part goes into thermal regulation.

Power Supply Recommendations

The devices are designed to operate from an input voltage supply range between 3.5V and 28V and current capability of at least the maximum designed charge current. This input supply should be well regulated.



DIO5030

600mA, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

Layout

Layout Guidelines

To obtain optimal performance, the decoupling capacitor from IN to GND and the output filter capacitors from BAT to GND should be placed as close as possible to the DIO5030, with short trace runs to both IN, BAT and GND.

- All low-current GND connections should be kept separate from the high-current charge or discharge paths from the battery. Use a single-point ground technique incorporating both the small signal ground path and the power ground path.
- The high current charge paths into IN terminal and from the BAT terminal must be sized appropriately for the maximum charge current in order to avoid voltage drops in these traces.

Typical Performance Characteristics

600mA, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

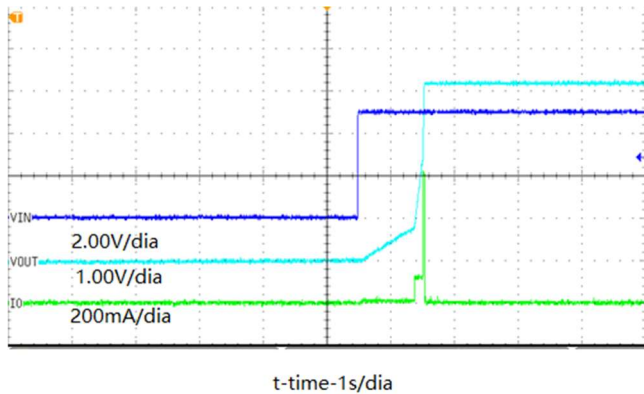


Figure 4. AC Charging

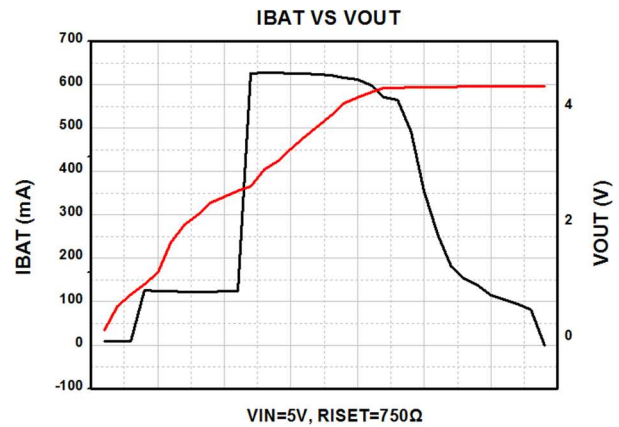


Figure 5. IBAT vs. VOUT

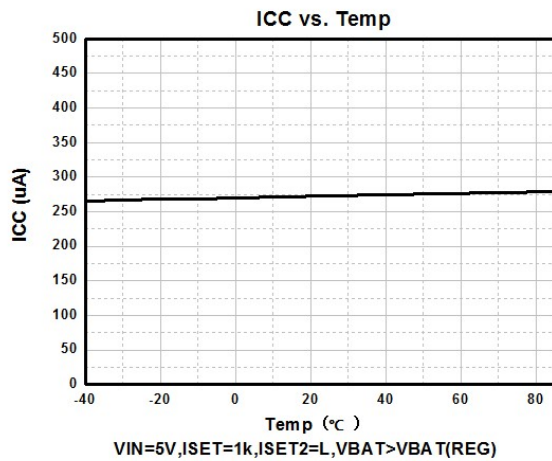


Figure 6. ICC vs. Temp

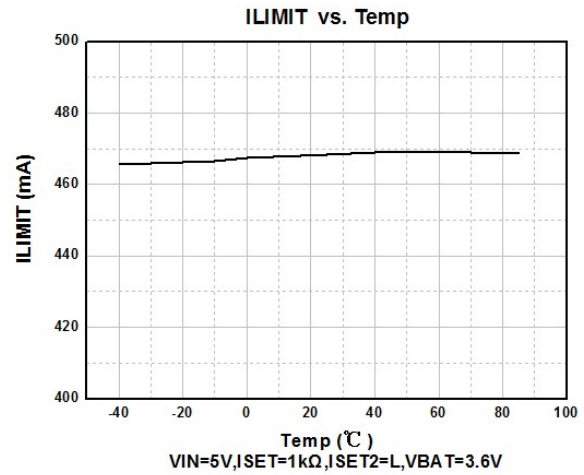


Figure 7. ILIMIT vs. Temp

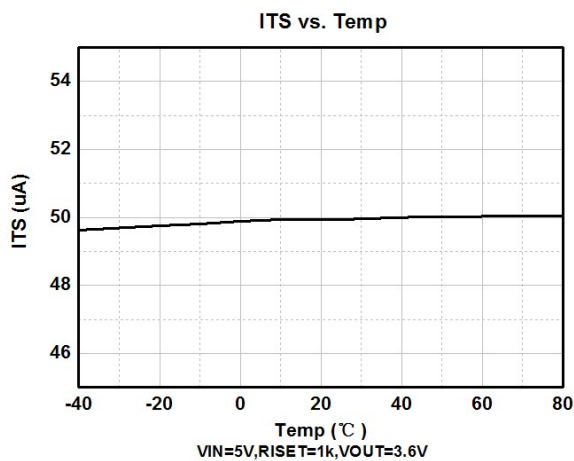


Figure 8. ITS vs. Temp



DIO5030

600mA, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

CONTACT US

Dioo is a professional design and sales corporation for high-quality and performance analog semiconductors. The company focuses on industry markets, such as, cell phone, handheld products, laptop, and medical equipment and so on. Dioo's product families include analog signal processing and amplifying, LED drivers and charger IC. Go to <http://www.dioo.com> for a complete list of Dioo product families.

For additional product information, or full datasheet, please contact with our Sales Department or Representatives.